





BRAVO UVENTILATED FAÇADE SYSTEM



VENTILATED FAÇADE SYSTEM DESIGNED FOR THE INSTALLATION OF COMPOSITE MATERIALS AND METAL SHEETS

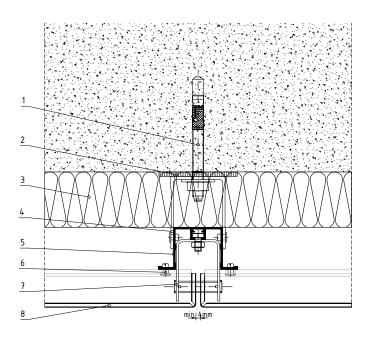

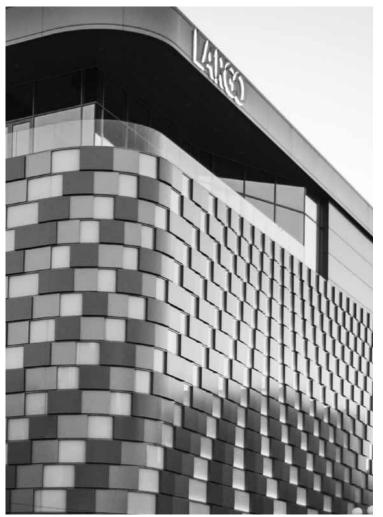

MAIN ADVANTAGES

Fast, easy and secure installation

Adjustment in 3 directions

Variable vertical gap - 4-26 mm

Easy pre-positioning of the hangers



DETAILS

DESIGN

DESIGNED ON THE PRINCIPLE OF NATURAL VENTILATION, ACHIEVED THROUGH THE CREATION OF A 4-8 CM ZONE BETWEEN THE FAÇADE MATERIAL AND THE THERMAL INSULATION

HIGH QUALITY PRODUCT

DEVELOPED TO ENSURE THE SAFE AND EFFICIENT INSTALLATION OF FLAT CLADDING MATERIALS TO THE BUILDING SUBSTRATE

SECURITY

THE SYSTEM ALLOWS THE MOVEMENT OF THE FAÇADE MATERIAL IN VARIOUS THERMAL EXPANSIONS WITHOUT COMPROMISING THE SECURE INSTALLATION OF THE CASSETTES

- 1. anchor
- 2. thermo pad
- **3.** thermal insulation
- 4. wall bracket
- 5. main supporting profile
- **6.** rivet 4.8x12 mm
- 7. hanger
- 8. Etalbond
- 9. plug

Optimal solution for flat and curved facades


Tested method of fixing that provides 3 dimensional adjustability

High level of sound insulation, water tightness

High energy efficiency

Natural ventilation

Specially designed fixing brackets and hangers

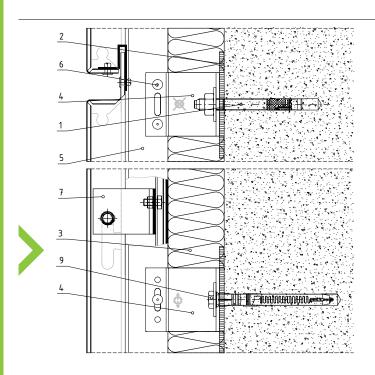

etem.com