





VENTILATED FAÇADE SYSTEM



VENTILATED FAÇADE SYSTEM, DESIGNED FOR MOUNTING WIDE RANGE OF FLAT FAÇADE MATERIALS BY USING ACCESSORIES, CALLED CLIPSES.

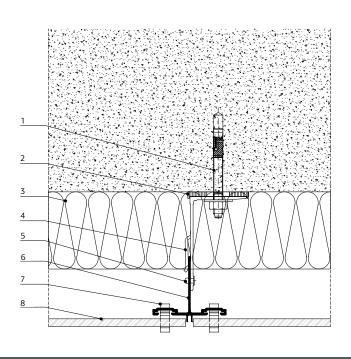

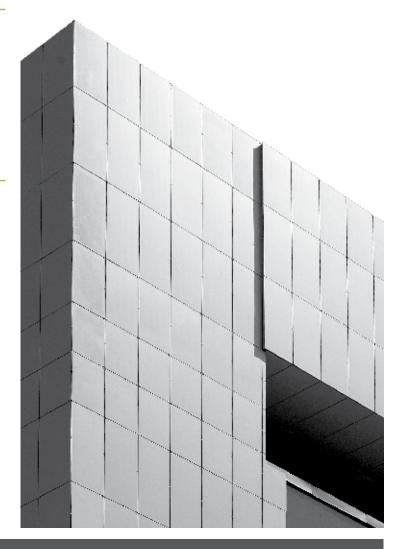

MAIN ADVANTAGES

Fast and accurate installation without using of special equipment

High resistance to external environment conditions

Precise defining the vertical gap

Big possibilities for façade design

Possibility for coating the elements – "clips"

Possibility for producing profiles with custom lengths

VARIO CLIPS

VENTILATED FAÇADE SYSTEM

CHARACTERISTICS

DESIGN

DESIGNED ON THE PRINCIPLE OF NATURAL VENTILATI ON, ACHIEVED THROUGH THE CREATION OF A 4-8 CM GAP BETWEEN THE FACADE MATERIAL AND THE THERMAL INSULATION, THE SYSTEM CONTAINS PRETREATD PROFILES AND SPECIAL DESIGNED "CLIPSES".

HIGH QUALITY PRODUCT

DEVELOPED TO ENSURE THE SAFE AND EFFICIENT INSTALLATION OF CLADDING MATERIALS TO THE BUILDING SUBSTRATE.

SECURITY

THE SYSTEM ALLOWS THE MOVEMENT
OF THE FAÇADE MATERIAL IN VARIOUS
THERMAL EXPANSIONS, USING WIDE VARIATY
OF PROFILES AND FIXING BRACKETS.

- 1. anchor
- 2. thermo pad
- **3.** thermal insulation
- 4. fixing bracket 100/90 mm
- **5.** rivet 4.8x12 mm
- 6. main supporting profile
- 7. middle clips
- 8. façade material
- 9. EPDM Gasket
- 10. thermo pad
- 11. fixing bracket 100/160 mm
- **12.** plug

Thickness of the façade material up to 12 mm


Excellent performance in high wind pressure

High energy efficiency

Natural ventilation

Special designed shape of the elements – "clipses"

Special designed main profile

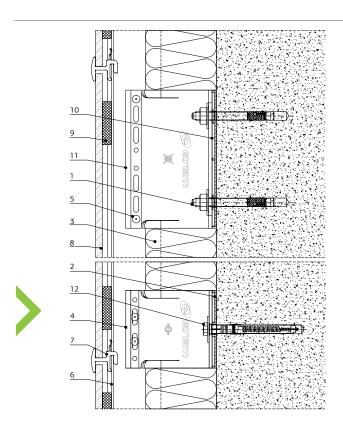

etem.com