



# E8000 Curtain Wall System

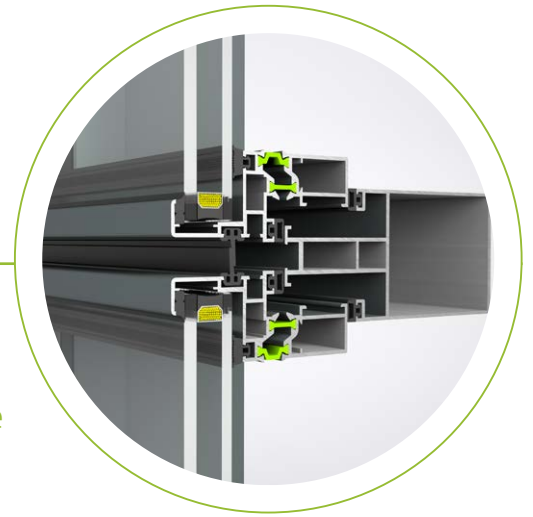

Offering both semi-structural and bonded glazing (widely known as structural glazing) solutions. The Curtain Walling incorporates projecting or parallel projecting infills that are using the same cassette profile ensuring a harmonized view, as well as doors. Supporting both thermally broken and non-thermally broken solutions.

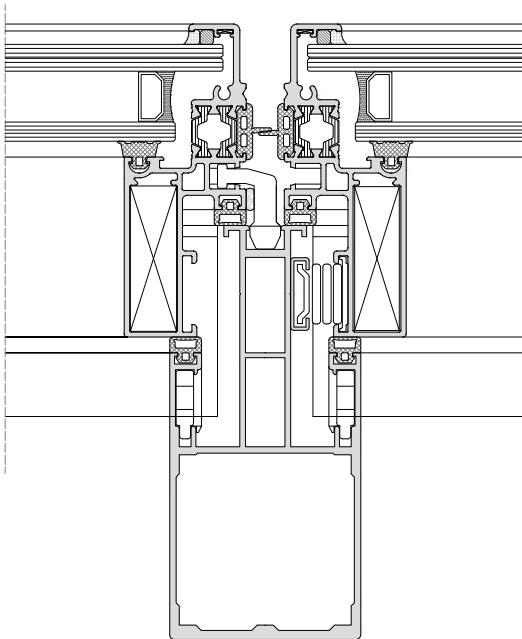

## Technical features

System basic width:  
60 mm (internal)

Min./max. system basic depth:  
146 mm / 273 mm

Glazing infill thickness:  
up to 38 mm

Max. weight: 130 kg

## Hardware accessories

Integration of external shading

Compatible with projected or parallel projected infills

## Surface treatment options

RAL colours

ETEM colours

Anodising

Wood effects


Quality Standards:

- QUALICOAT
- QUALANOD
- QUALIDECO

## Performance

Air permeability:	up to class <b>AE</b>
Watertightness [Static]:	up to class <b>RE2100</b>
Watertightness [Dynamic]:	<b>200 Pa / 600 Pa</b>
Resistance to Wind Load [Design Load]:	<b>± 3000Pa</b>
Impact Resistance:	up to class <b>I5 / E5</b>
Thermal transmittance:	from <b>1.9 W/(m<sup>2</sup>K)</b>
Adhesion test [ETAG 002-1]:	<b>PASS</b>

## Typologies

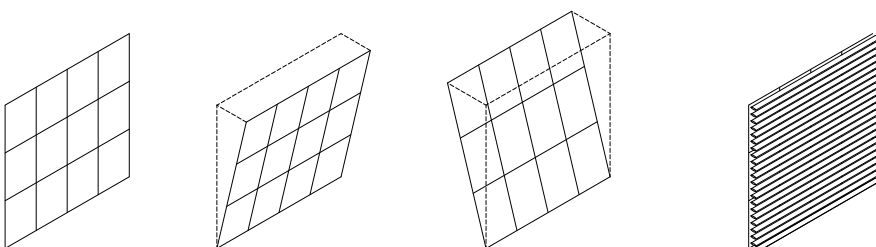

## Production certificates

- EN ISO 9001
- EN ISO 14001
- OHSAS 18001