



# EB50



## GLASS BALUSTRADE SYSTEM

A frameless glass balustrade system, with aluminium base without additional vertical support. It accommodates various types of infills and supports multiple anchoring methods. The base design prevents from stepping on it. It can be installed on or embedded to the floor level. Ideal for areas susceptible to overcrowding.



### TECHNICAL FEATURES

Base width:	50mm
Base height:	114mm
Glazing infill range:	17,5mm / 21,5mm

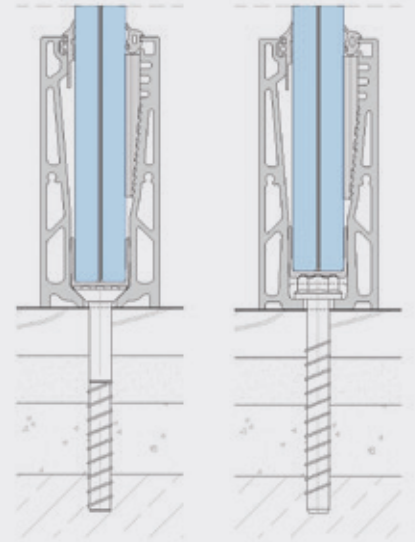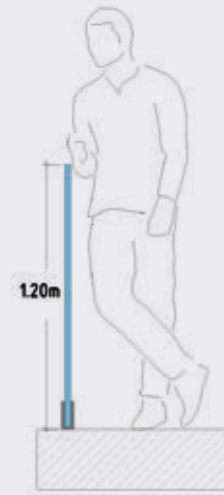


### PERFORMANCE

Imposed line load at 25mm:	up to 1,6kN/m
Working line load:	up to 1,5kN/m
Horizontal static load:	up to 1,7kN/m
Dynamic impact:	up to 50kg



### TYOLOGIES

- o Base E2050103 for installation with countersunk head screws
- o Base E2050104 for installation with hexagon head screws

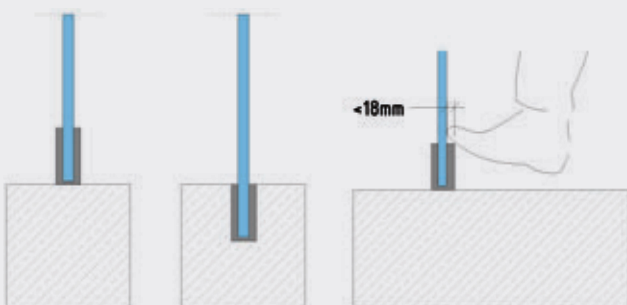

### HARDWARE

Anchoring methods: screws with hexagon or countersunk head  
EPDM gaskets  
Two plastic wedge options

### SURFACE TREATMENT

QUALICOAT - Powder coating  
QUALANOD - Anodising  
QUALIDECO - Wood effects