



* The presented performance classes do not represent a specific specimen. Please contact ETEM Technical Service for specifications and configurations.

ES38


SLIDING SYSTEM



A sliding window system with thermal break, capable to support a large variety of solutions. It provides solutions to several configurations thanks to its wide profile range. It offers options with low rail and/or narrow interlock. Integration with narrow or classic flyscreen and/or shutter is available.

TECHNICAL FEATURES

Sash width:	38mm
Sash height:	79mm / 82mm / 100mm
Rail height:	32mm / 44mm
Interlock width:	36mm / 53mm / 86mm / 106mm
Glazing infill range:	22 ÷ 26mm
Max. sash height:	2.400mm
Max. sash width:	2.000mm

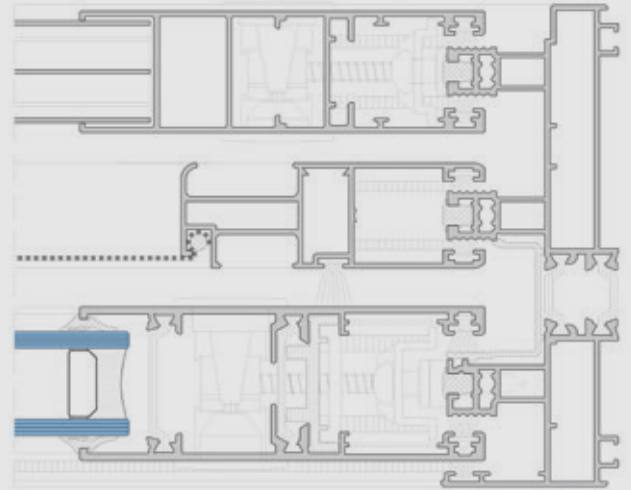

PERFORMANCE*

Air permeability:	up to Class 4
Watertightness:	up to Class 7A
Resistance to wind load:	up to Class C4/B4
Thermal transmittance (Uf):	from 2,9 W/(m²K)



TYOLOGIES

- o Single-sash, double-sash, triple-sash or quadruple-sash
- o Sliding, opposed, pocket (in-wall) or sliding with fixed light (hotel type)
- o With or without flyscreen and/or shutter



HARDWARE

Slide mechanism
Stainless steel rail
Single, multiple point or in-line locking mechanism
Max. sash weight: 130kg

SURFACE TREATMENT

QUALICOAT - Powder coating
QUALANOD - Anodising
QUALIDECO - Wood effects