



ES70


SLIDING SYSTEM



A heavy duty sliding window system with thermal break. It is developed to support a large variety of solutions, ensuring unique operation. It provides options with flat rail and/or narrow interlock. Integration with flyscreen is available. Ideal for large openings or extremely thick glazing infill.

TECHNICAL FEATURES

Sash width:	70mm
Min. sash height:	103mm
Rail height:	30mm / 48mm
Interlock width:	54mm / 113mm
Glazing infill range:	25 ÷ 52mm

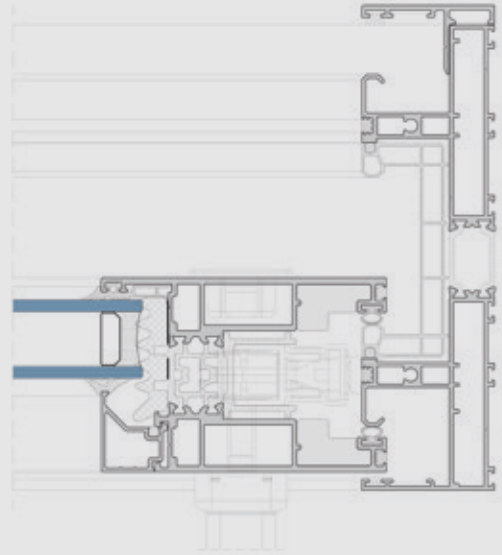


PERFORMANCE*

Air permeability:	up to Class 4
Watertightness:	up to Class E900
Resistance to wind load:	up to Class C5
Thermal transmittance (U_f):	from 2,3 W/(m ² K)
Acoustic performance:	up to 45 dB
Impact resistance:	up to Class 3



TYOLOGIES

- o Single-sash, double-sash, triple-sash & quadruple-sash
- o Sliding, opposed, sliding with fixed light (hotel type) or corner configuration
- o With or without flyscreen

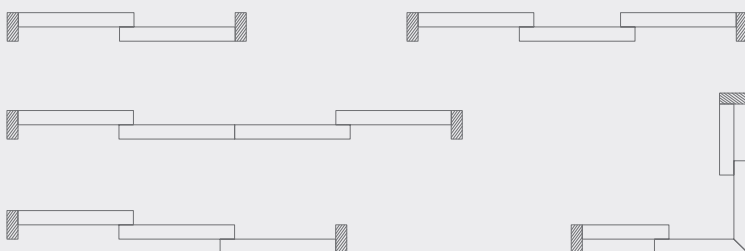

HARDWARE

Lift & slide mechanism
Stainless steel rail
Single or multiple point lock
Max. mechanism weight: 600kg
Max. height : 3.300mm
Max. width: 3.300mm

SURFACE TREATMENT

QUALICOAT - Powder coating
QUALANOD - Anodising
QUALIDECO - Wood effects